

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

## Undercounter Mount Rinser Faucet

UMRF



UMRF  
Front View



**Intertek**  
4004503  
Conforms to ANSI/NSF STD 2



UMRF  
Back View

Integrated C-channel  
Stiffener

### Standard Features

- All 18 gauge stainless steel construction
- Pan includes radius interior corners for easy cleaning
- Total welded construction with integrated C-channel sides for incredible rigidity
- Installation kit for plumbing 1/2" tailpiece drain - includes 10' of vinyl drain tube, (3) ty wraps, (1) elbow, (1) elbow to drain-line adaptor, (4) #10 x 1/2 screws
- Rear deck area with pre-punched screw holes for mounting to underside of bar top

### Specifications

*Drain*

- 1/2" tailpiece

*Materials*

- 18 gauge stainless steel

*Faucet*

- Accepts 3/8" cold water lead
- 30 psi water pressure regulator included


### Installation Notes

- Important: Unit must be installed in conformance with applicable federal, state, and local plumbing codes, including adequate backflow when required.
- Install in-line water regulator (included).
- A separate shut-off valve is recommended (not included).


<p>03012383 Rinser Faucet Assembly</p>	 <b>Intertek</b> 4004503 Conforms to NSF/ANSI STD 372
--	--

To view cleaning and care instructions, please visit: [http://www.glastender.com/PDF/F-423-011\\_ss\\_clean\\_care.pdf](http://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf)


### Dimensional Information



TOP VIEW



FRONT VIEW

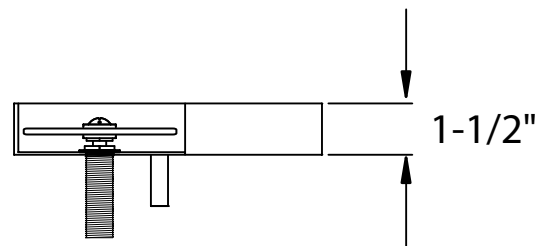

RIGHT SIDE VIEW

<p><b>Glastender, Inc.</b> • 5400 North Michigan Road • Saginaw, MI • 48604-9780          989.752.4275 • 800.748.0423 • Fax 989.752.4444  <a href="http://www.glastender.com">www.glastender.com</a></p>	<p>Approval/Notes:</p>
Specifications subject to change without notice. For current specifications please visit our website.	