


Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

## Narrow Door Coolers Two, Three and Four Door Remote\*



ND60R-SS(RRR)

**Intertek** 4004503 **Intertek**  
Conforms to NSF/ANSI STD 7 and UL STD 471  
Certified to CSA STD C22.2 No. 120  
Meets NSF 7 requirements for open food storage

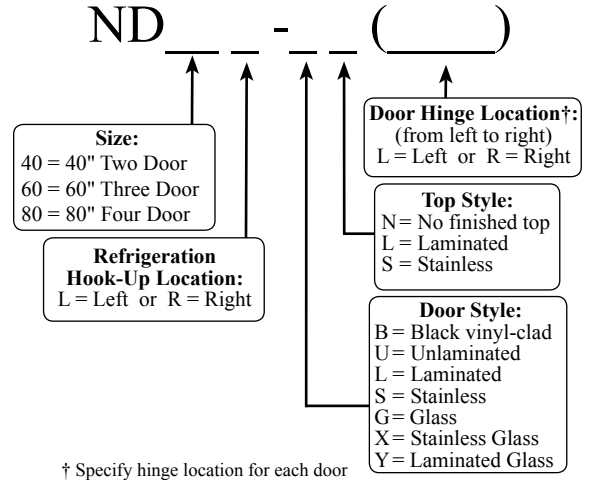

### Standard Features

- DOE 2017 compliant
- Remote unit
- All stainless steel interior with radius corners is easy to keep clean
- Locking doors
- LED interior lighting
- Heated mullion to minimize condensation
- Available without a finished top for integrated installation below customer supplied bar top
- 180° swinging doors
- Leg sockets recessed into base
- Stainless steel evaporator housing with separate removable evaporator drain pan

### Specifications

#### Electrical

- 120V, 1 phase, 60 Hz
- Dedicated 15 amp circuit is required
- 14 gauge wire connection is made inside the cooler next to evaporator housing - interior access is through one of the 3/4" side knock-out holes (electrician's choice)

#### Refrigeration

- R134a or R404a expansion valve & temperature control included. Specify type required when ordering.
- Refrigeration system capacity requirements\*:  
ND40 - 1,000 BTU/hr  
ND60 - 1,300 BTU/hr  
ND80 - 1,600 BTU/hr
- \* BTU/hr design loads are figured assuming 85° F ambient, all glass doors, maximum internal loading, and average compressor cycling. No solar heat gain has been accounted for.
- All refrigeration hookups are made at the installation site

#### Plumbing

- A six foot length of 1/2" ID by 5/8" OD plastic tubing is provided to drain condensate. The tubing should exit through one of the 3/4" side knock-out holes (installer's choice). The maximum drainage is one ounce per hour - consult local codes for compliance - a floor drain may be required

#### Shelving

- Two adjustable coated shelves and one bottom coated rack per door included

#### Materials

- Stainless steel parts include: interior, front of cabinet, hinges, hinge and lock brackets, and optional legs
- Black vinyl-clad steel parts include: standard sides and doors
- Galvanized steel parts include: exterior sub-top, back and bottom
- Zinc plated CR steel parts include: leg sockets

#### Weight Bearing Capacity

- Counter tops and other accessories should not exceed 500 pounds per door

#### Capacities

	ND40	ND60	ND80
• 12 oz. bottles, cases	12.3	19.9	27.7
• 750ml wine bottles	116	188	260
• 1/6 barrel kegs	6	10	14


- Door width does not allow of 1/2 barrel keg storage

<b>Glastender, Inc.</b> • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com	Approval/Notes:
---	-----------------


Specifications subject to change without notice. For current specifications please visit our website.

# Remote Narrow Door Coolers


## Dimensional Information

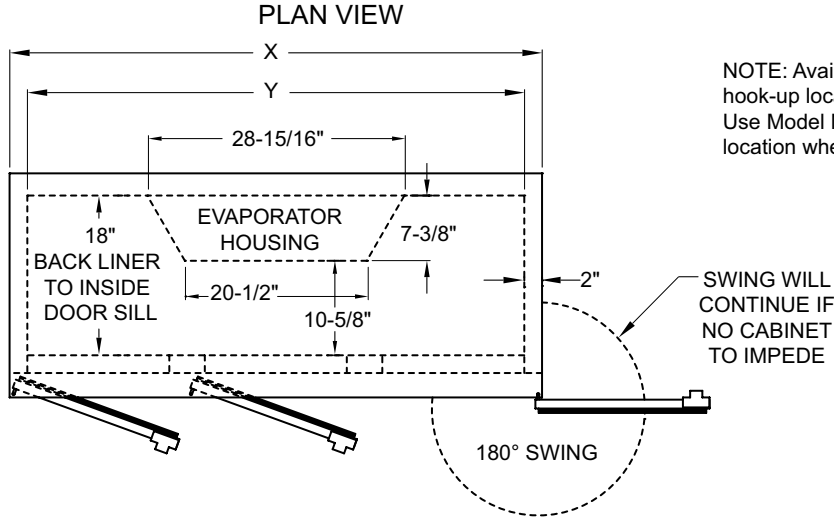

NOTE: Available with refrigeration hook-up location left or right. Use Model Number Key to specify location when ordering.

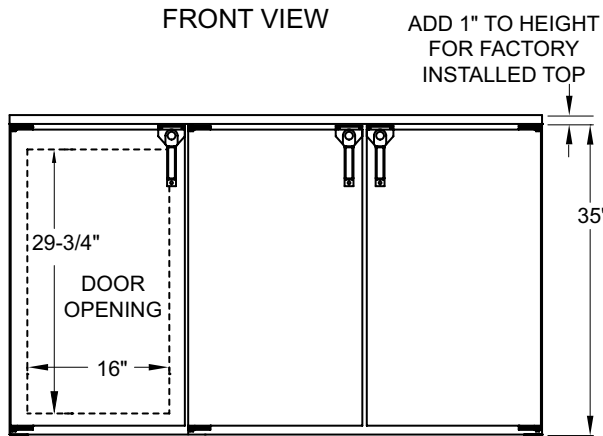

Model	X	Y	Doors
ND40	40"	36"	2
ND60	60"	56"	3
ND80	80"	76"	4

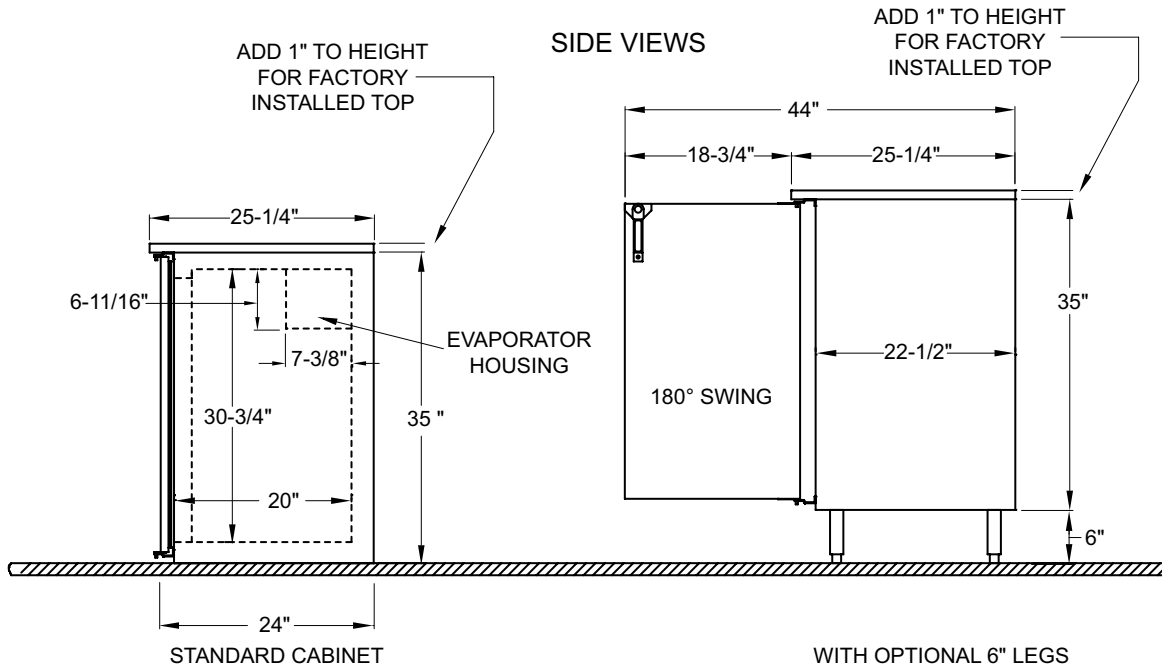

5400 N Michigan Rd • Saginaw, MI • 48604-9780  
 989.752.4275 • 800.748.0423 • Fax 989.752.4444  
 www.glastender.com