


Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	


## 24" Low Profile Cooler One Door Remote



LP24L-SS(R)



4004503  
Conforms to NSF/ANSI STD 7 and UL STD 471  
Certified to CSA STD C22.2 No. 120  
Meets NSF 7 requirements for open food storage

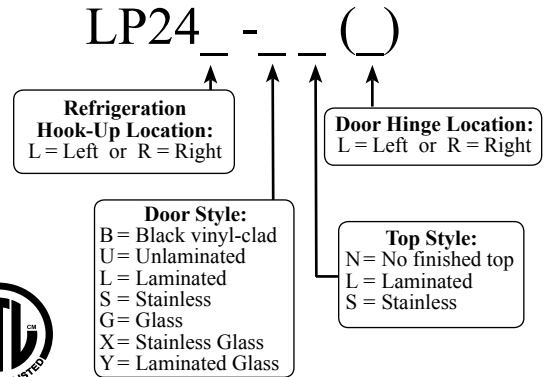

### Standard Features

- Remote unit
- All stainless steel interior with radius corners is easy to keep clean
- Locking door
- LED interior lighting
- Available without a finished top for integrated installation below customer supplied bar top
- 180° swinging door
- Leg sockets recessed into base

### Specifications

- Electrical**
- 120V, 1 phase, 60 Hz
  - Dedicated 15 amp circuit is required
  - 14 gauge wire connection is made inside the cooler next to evaporator housing
- Refrigeration**
- R134a or R404a expansion valve & temperature control included. Specify type required when ordering.
  - Refrigeration system capacity requirements\*: LP24 - 800 BTU/hr
  - \* BTU/hr design loads are figured assuming 85° F ambient, 15° F evaporator temperature, all glass doors, maximum internal loading, and average compressor cycling. No solar heat gain has been accounted for.
  - All refrigeration hookups are made at the installation site
- Plumbing**
- A ten foot length of 1/2" ID by 5/8" OD plastic tubing is provided to drain condensate. The tubing should exit through one of the 3/4" side knock-out holes (installer's choice). The maximum drainage is one ounce per hour - consult local codes for compliance - a floor drain may be required

- Shelving**
- One adjustable coated shelf and one bottom coated rack per door included
- Materials**
- Stainless steel parts include: interior, front of cabinet, hinges, hinge and lock brackets, and optional legs
  - Black vinyl-clad steel parts include: standard sides and doors
  - Galvanized steel parts include: exterior sub-top, back and bottom
  - Zinc plated CR steel parts include: leg sockets
- Weight Bearing Capacity**
- Counter tops and other accessories should not exceed 400 pounds
- Capacities**
- 4.3 - cases long neck bottles
  - 36 - 750ml wine bottles


<p><b>Glastender, Inc.</b> • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com</p>	<p>Approval/Notes:</p>
--	------------------------

Specifications subject to change without notice. For current specifications please visit our website.

# One Door Remote Low Profile Cooler

## Dimensional Information


### PLAN VIEW

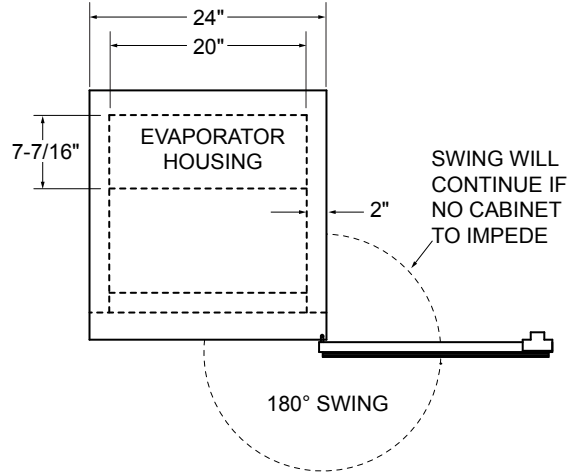


NOTE: Available with refrigeration hook-up location left or right. Use Model Number Key to specify location when ordering.

### FRONT VIEW

ADD 1" TO HEIGHT FOR FACTORY INSTALLED TOP



### SIDE VIEWS

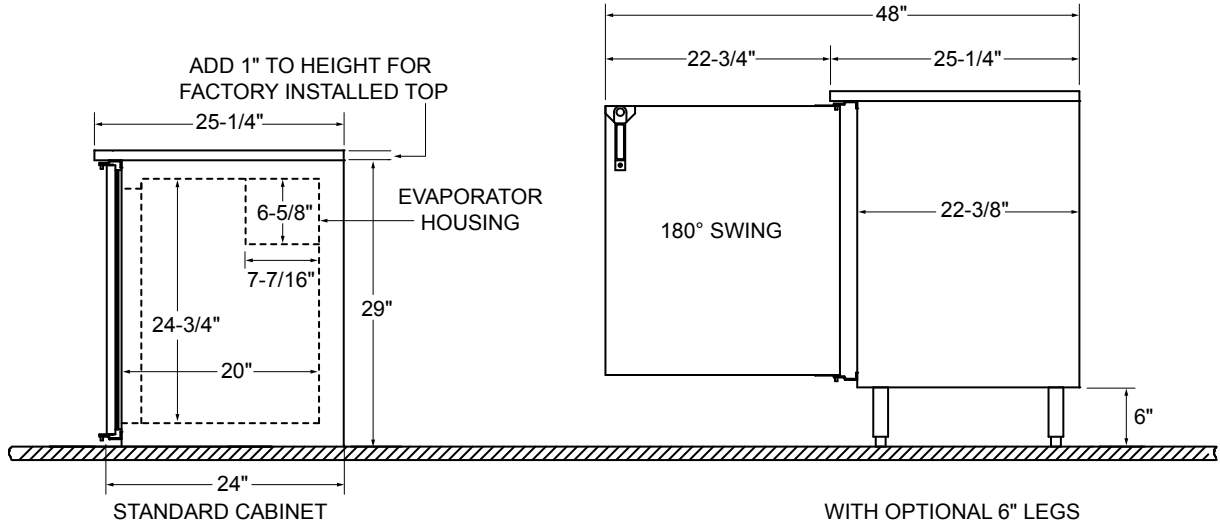

5400 N Michigan Rd • Saginaw, MI • 48604-9780  
 989.752.4275 • 800.748.0423 • Fax 989.752.4444  
 www.glastender.com

Printed in USA