




MF48-S2

NOTE: Units come standard with bottom rack, which is recommended for chilling stacked plates. Two additional layers of shelves are optional, which is recommended for chilling glassware.

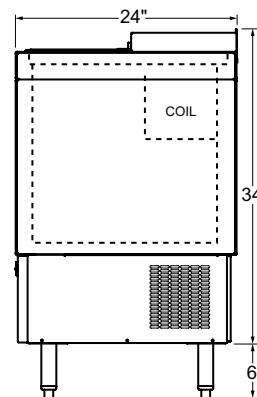

MF24
Side Elevation

24" MODELS


BLACK VINYL-CLAD EXTERIOR		STAINLESS STEEL EXTERIOR		NUMBER OF SHELVES	WGT
MODEL	LIST	MODEL	LIST		
MF24-B	\$6,580	MF24-S	\$6,855	0	195#
MF24-B2	\$6,770	MF24-S2	\$7,044	2	205#

36" MODELS

BLACK VINYL-CLAD EXTERIOR		STAINLESS STEEL EXTERIOR		NUMBER OF SHELVES	WGT
MODEL	LIST	MODEL	LIST		
MF36-B	\$7,388	MF36-S	\$7,681	0	235#
MF36-B2	\$7,679	MF36-S2	\$7,973	2	255#

48" MODELS

BLACK VINYL-CLAD EXTERIOR		STAINLESS STEEL EXTERIOR		NUMBER OF SHELVES	WGT
MODEL	LIST	MODEL	LIST		
MF48-B	\$8,334	MF48-S	\$8,649	0	280#
MF48-B2	\$8,733	MF48-S2	\$9,046	2	300#

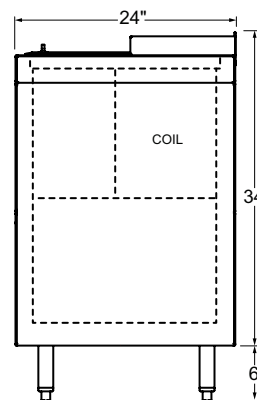

MF36, MF48
Side Elevation

ACCESSORIES

MODEL	DESCRIPTION	LIST	WT
C-4X4-1/8	4-1/8"H caster, set of four	\$182	4#
C-4X2-7/8	2-7/8"H caster, set of four	\$176	4#
C-4X1	1-1/2"H caster, set of four	\$310	2#
LEG06X4	Legs (set of 4), 6" (MF36, 48)	\$204	5#
MFKR-24	24" kick rail	\$127	2#
MFKR-36	36" kick rail	\$142	3#
MFKR-48	48" kick rail	\$158	4#
SSR-24	24" single speed rail	\$318	7#
SSR-36	36" single speed rail	\$369	12#
SSR-48	48" single speed rail	\$424	22#
MFBS-24	24" backsplash	\$161	4#
MFBS-36	36" backsplash	\$186	6#
MFBS-48	48" backsplash	\$206	8#
CE-220/50S	Convert self-contained unit to 220V/50Hz electrical	\$307	N/A

PRODUCT INFORMATION

(see MF Spec Sheet for complete details)

STANDARD FEATURES: All stainless steel interior construction
 • Units come standard with bottom rack, which is recommended for chilling stacked plates. Two additional layers of shelves are optional, which is recommended for chilling glassware. • Two Defrost Cycles: *Automatic* - occurs every eight hours without affecting normal operation, *Manual* - user initiated button for complete six-hour defrost with automatic restart

ELECTRICAL: 120V, 1 phase, 60 Hz, 6.0 full load amps. Includes 9-foot grounded cord.

REFRIGERATION: 1/3 HP, R290 refrigerant, operating range: 12°F to 35°F

PLUMBING: No drain connection required

CAPACITY: Pint glasses - 24" Model = 55♦, 36" Model = 87♦, 48" Model = 147♦

♦ Based on models with two additional layers of shelves and filled with 3-1/2" diameter by 5-7/8" high pint glasses

Bar Refrigeration