

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	


## Reach-in Mug Frosters One & Two Door Self-contained




MFV24-SS(L)



MFV48-SS(LR)



4004503  
Conforms to NSF/ANSI STD 7  
and UL STD 471  
Certified to CSA STD C22.2 No. 120

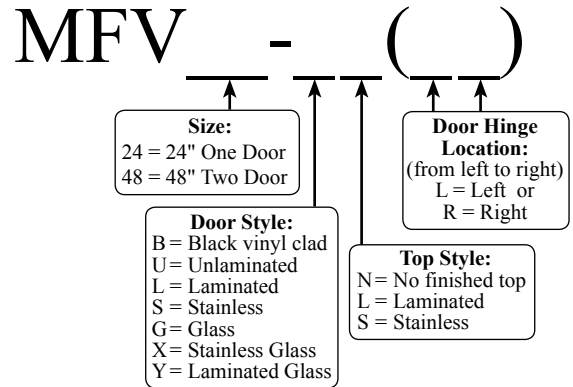

### Standard Features

- Self-contained high capacity refrigeration system
- Digital thermostat control with automatic defrost is easily visible
- Two Defrost Cycles:
  1. Automatic - occurs every eight hours without affecting normal operation
  2. Manual - user initiated button for complete six-hour defrost with automatic restart
- Removable refrigeration module for easy maintenance
- All stainless steel interior
- Bottom rack and two adjustable shelves per door
- Includes LED interior lights with on/off switch
- Completely front venting - can be built into a back bar or used as a free standing unit
- Available without a finished top for integrated installation below customer supplied bar top
- Stainless steel sides
- Automatic condensate evaporator
- Foamed-in-place insulation
- Front of cabinet is electrically heated
- Stainless steel die cast handle with lock
- 180° swinging doors
- Optional 3-3/4" casters or 6" legs are available

### Specifications

#### Electrical

- 120V, 1 phase, 60 Hz, 7.1 full load amps
- Dedicated 15 amp circuit is required
- Includes a 6 foot NEMA 5-15P grounded cord and plug which exits the back of refrigeration compartment

#### Refrigeration

- 1/3 HP, R404A refrigerant
- Heat rejection - 2907 BTU/Hr
- Operating range: 12°F (-11°C) to 35°F (2°C)
- Fin & tube evaporator with forced air circulation
- Equipped with manual fast freeze mode that accelerates the freezing process and automatically reverts back to the normal operating mode



#### Plumbing

- Automatic condensate evaporator. No drain connection required

#### Shelving

- Bottom rack and two shelves included

#### Capacity

- 10-oz mugs: MFV24 - 108, MFV48 - 252
- 6" high pint glass: MFV24 - 75, MFV48 - 180

#### Legs

- Optional 6" legs, specify accessory #CLS-4
- 1-5/8" diameter
- Stainless steel bullet feet

#### Materials

- Stainless steel parts include: interior, front of cabinet, exterior sides, hinges, hinge and lock brackets, and optional legs
- Black vinyl-clad steel parts include: standard doors and compressor cover
- Galvanized steel parts include: exterior sub-top, back and bottom
- Zinc plated CR steel parts include: leg sockets

Glastender, Inc. • 5400 North Michigan Road • Saginaw, MI • 48604-9780  
989.752.4275 • 800.748.0423 • Fax 989.752.4444  
www.glastender.com


Approval/Notes:

Specifications subject to change without notice. For current specifications please visit our website.


# Reach-In Mug Froster

## Dimensional Information

### MFV24

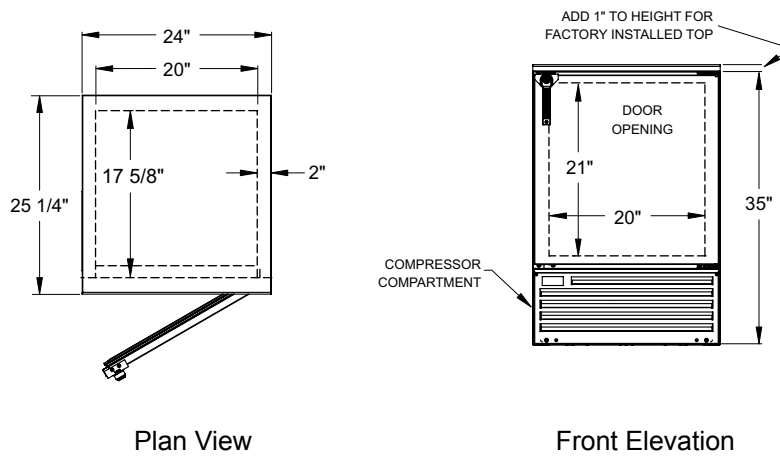

### MFV48

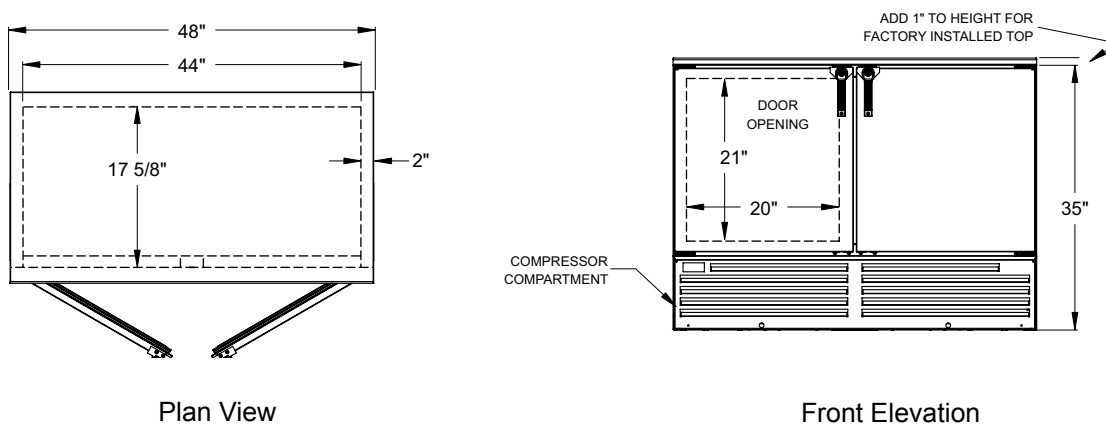

## Side View All Models

